




Design Specification Sheet

V1.18

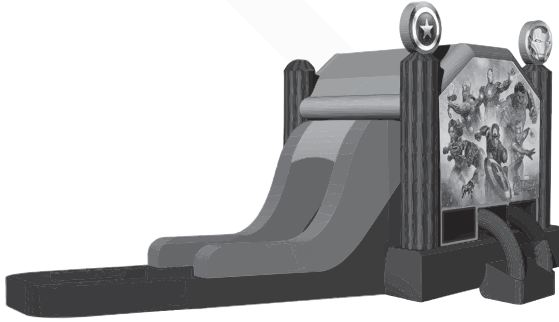

Marvel Avengers EZ Combo Wet or Dry

© MARVEL

Serial Number: _____

28' x 14'6" x 14'

Inflated Dimensions (L x W x H)

30" x 30" x 46"

Static Dimensions (L x W x H)

Item Number: 78386m Weight: 285 Lbs (129.3 Kg)

Emergency Evacuation Procedures


-Number of Exits: 1

In case of an emergency, such as outlined on page 21 of the owners manual, stay calm, and assist patrons to safely exit the inflatable. Exit locations are identified below.


To assist in the supervising and evacuating of patrons operators/attendants should use a whistle.




WET (Pool Version)

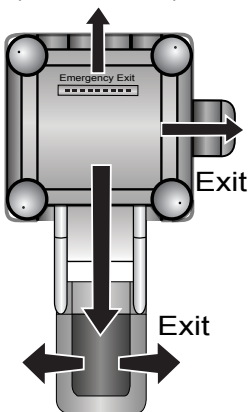

DRY (Pool Version)

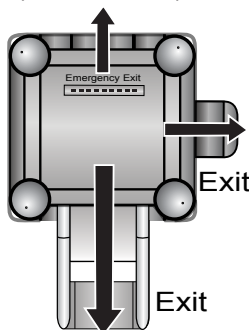

WET/DRY (Landing Version)

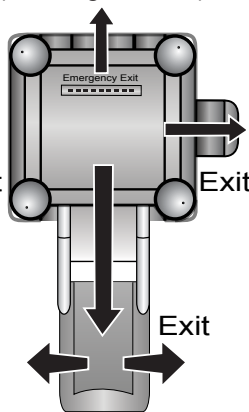

Operator/Attendant




1

Installers




Recommended: 1

Blowers



1 x 1hp

Height



Max Weight (per patron)



150 Lbs

Max Patrons




5

Outdoor: Stakes


36" long

BURIED
75%
(or 27")



4

Indoor: Sand Bags










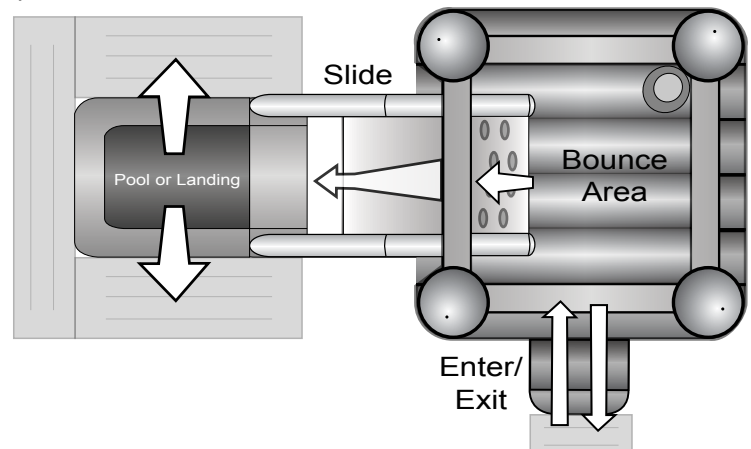


4


This Inflatable Includes:

-Bouncing Area -Climb -Slide -Basketball Hoop -Pool or Landing

Patrons will enter the bounce house from the entrance and bounce around. When playing basketball in the bounce area, patrons should not hang from the hoop since that can cause tear to the inflatable and other potential hazards. To slide patrons climb from within the bounce area and slide out of the ride, one at a time. Patrons should not play near exit/entrance, bounce against the walls or supporting structures, tumble, flip, chase, or wrestle. If used wet, there should not be anyone in/on the pool when a patron is sliding down. This may cause an injurious collision. The operator must make sure that each patron exits after sliding to allow for the next patron to slide down. Water will drip down from misting system and drain out to the pool, as patrons slide down and exit slide.





Anchoring Positions	Legend:								
This inflatable contains: 4 Anchor Points	Anchor Points	Blower	Inflation Tube	Deflation Zipper	Velcro Flap	Misting System	Impact Mats	Operator	Certified Life Guard
									

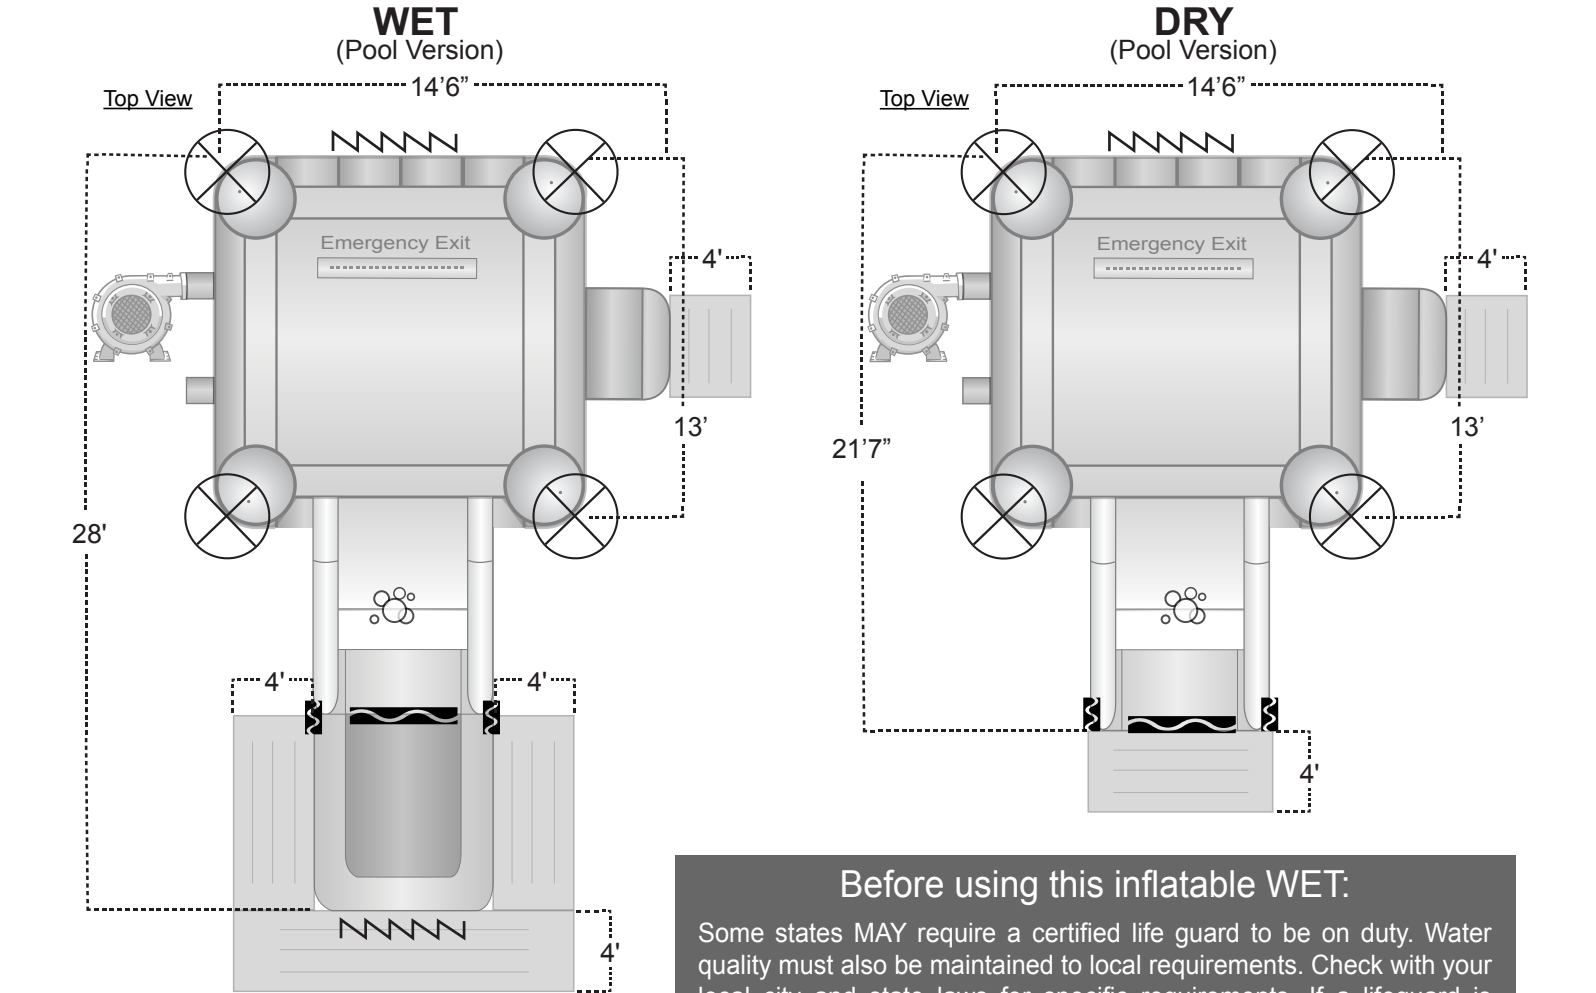

Before using this inflatable WET:


Some states MAY require a certified life guard to be on duty. Water quality must also be maintained to local requirements. Check with your local city and state laws for specific requirements. If a lifeguard is required, the proper position is indicated below.

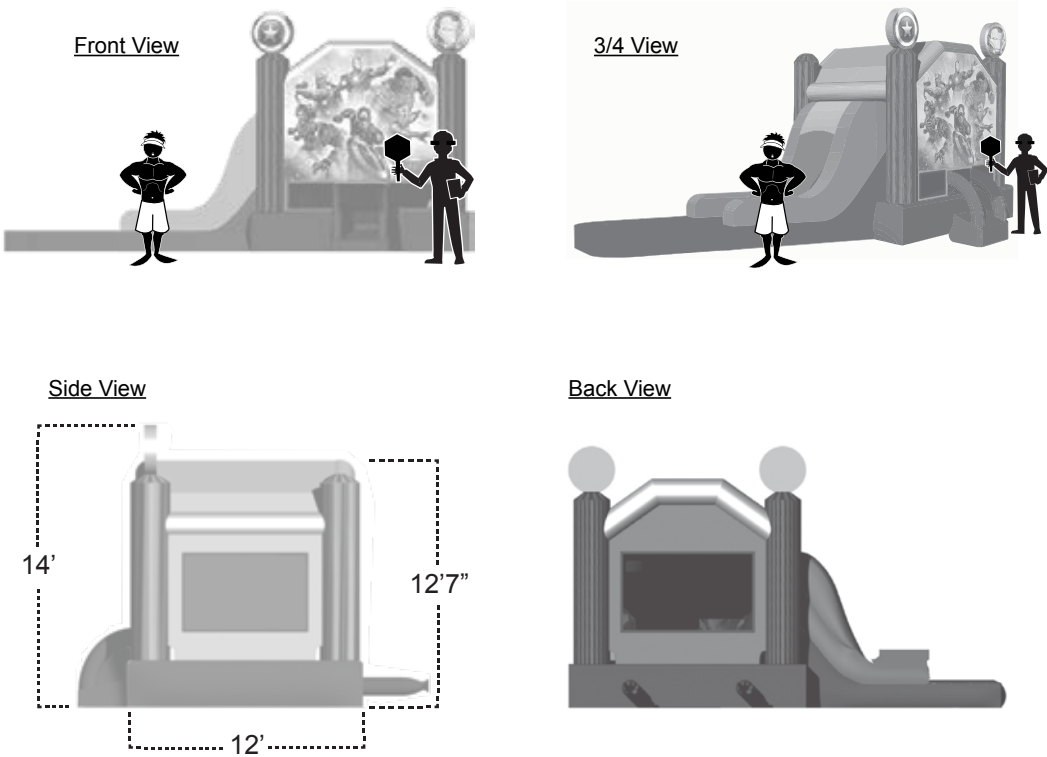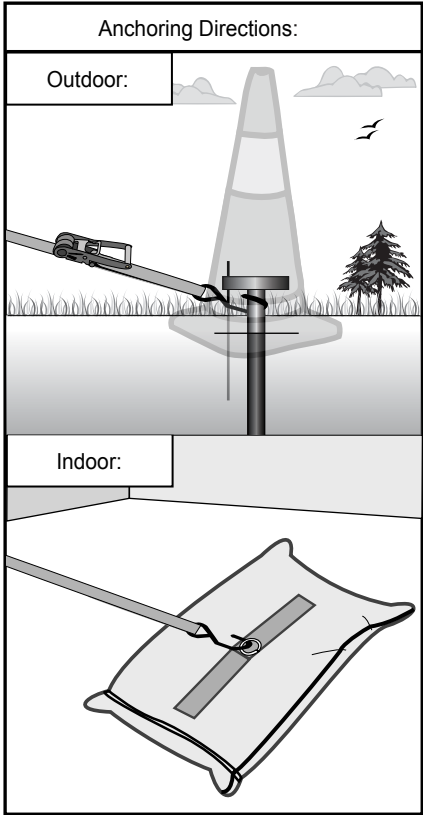


Anchoring Positions
This inflatable contains: 4 Anchor Points

Legend:									
Anchor Points	Blower	Inflation Tube	Deflation Zipper	Velcro Flap	Misting System	Impact Mats	Operator	Certified Life Guard	

WET
(Landing Version)

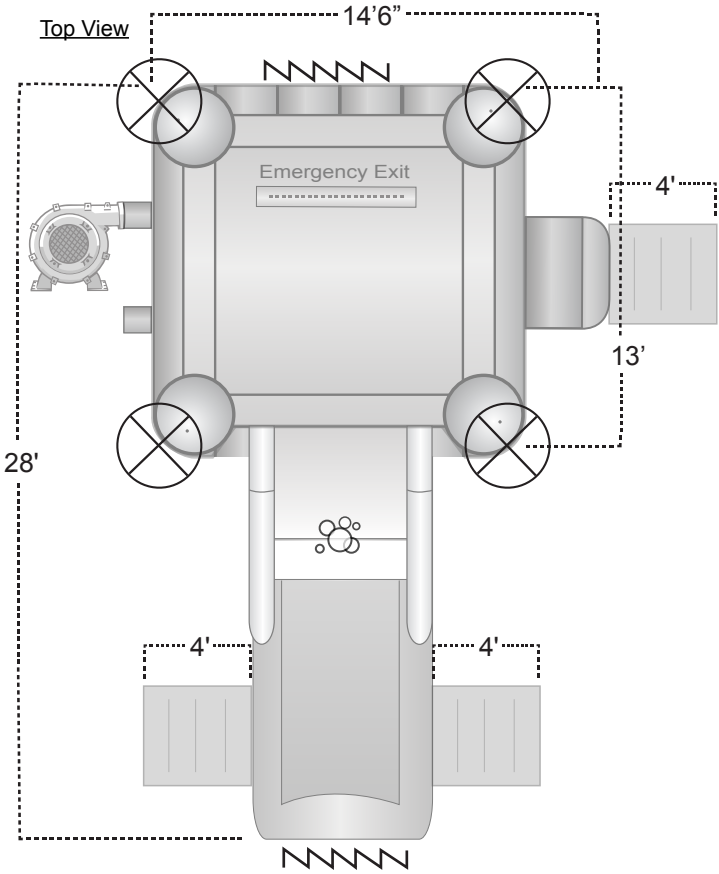





DRY
(Landing Version)

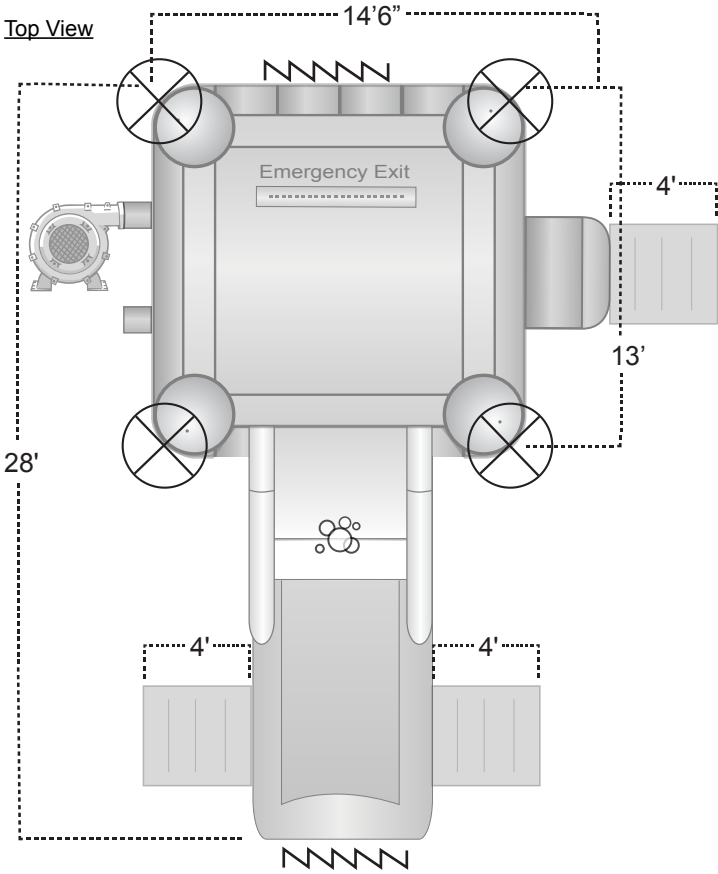

Anchoring Directions:

Outdoor:


Indoor:

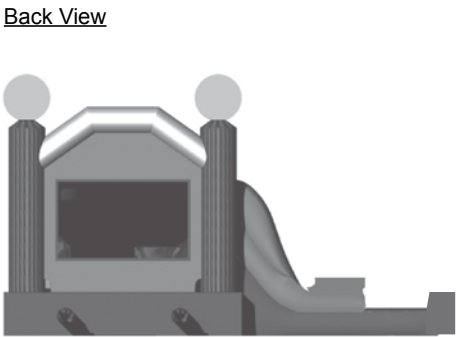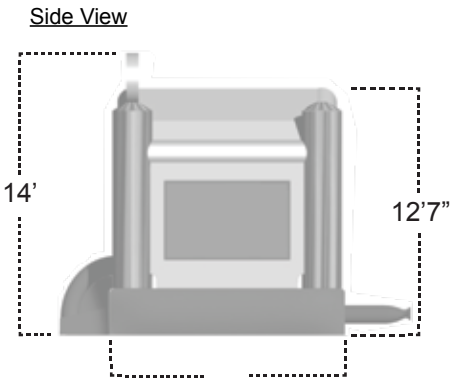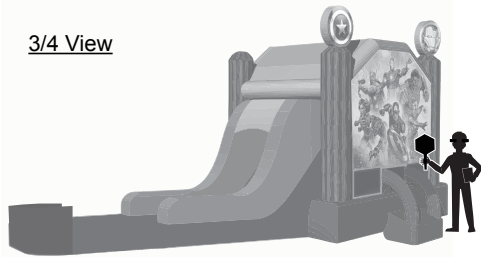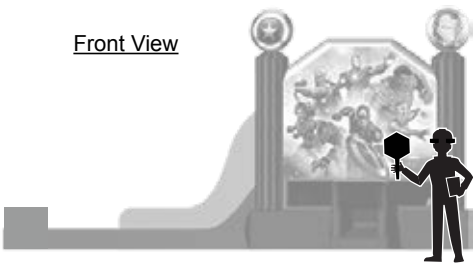


Before using this inflatable WET:

(Only applies to Pool Version)

- Before inflating, detach velcro flap to open up the pool extension. The pool is permanently connected to inflatable and will fill with air during inflation.

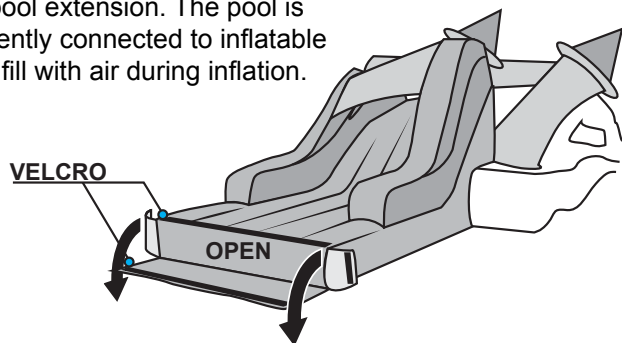


- Make sure slide and pool lining are securely in place before use.
- Operator/Attendant should ensure pool is filled with sufficient water before use and should inspect water fill during use. If water level has decreased, operator/attendant should stop play and fill water to proper level before allowing patrons to use.

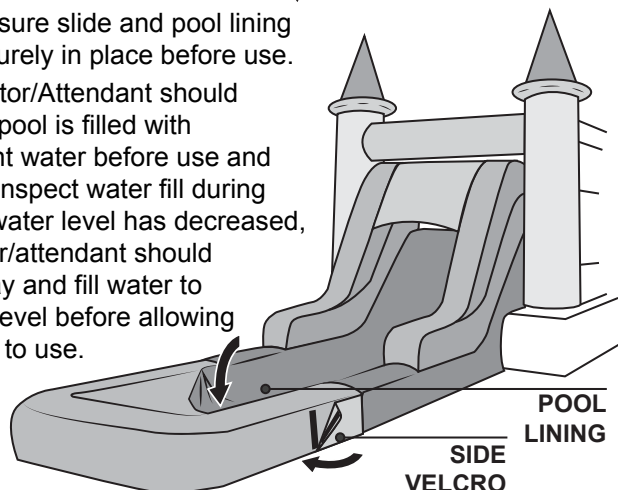

Misting System:

Using the available velcro flaps, secure the misting system to the designated areas along the wall of the slide lane. Connect to standard garden hose and open spigot a quarter turn. Minimal water pressure is required for proper use. Water will drop down on slide portion. Excessive water will create unsafe conditions.

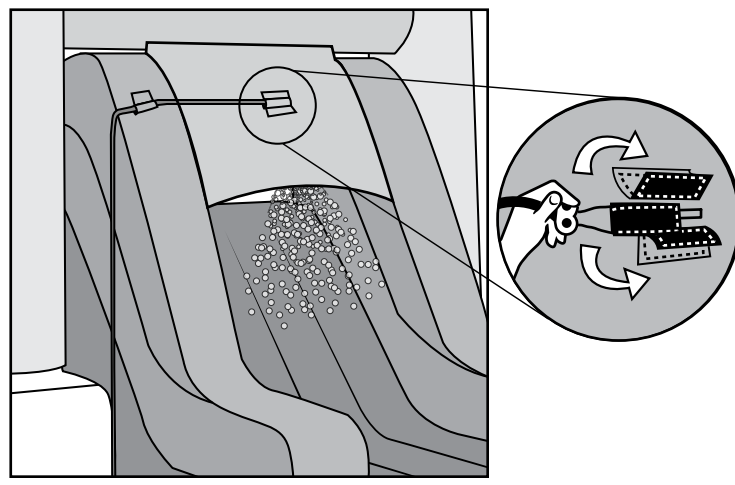


Safety labels found on inflatable:


Patron Safety Rules (SR1)



Impact Mat Installation:

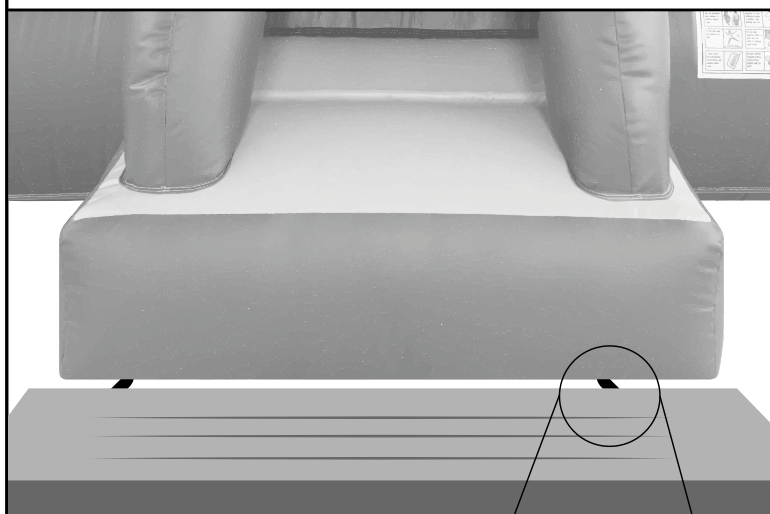

- ASTM F2374 requires that impact mats be placed where patrons enter and/or exit the inflatable. Impact mats should extend at least 4ft (1.2m) from any uncontained edge of the inflatable. Securely fasten impact mats to inflatable ramps using 2" carabiners (built in D-ring's found under all inflatables manufactured after October 2018).

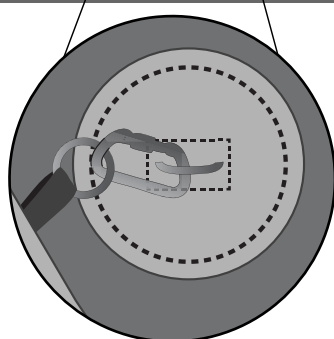

Slide Warning (SL1)



Climb Warning (CL1)



Safety Warning EZ Wet or Dry (EZ1)



Flexi Mist Tag (FM1)

